


Versatower 100

30m Heavy duty series

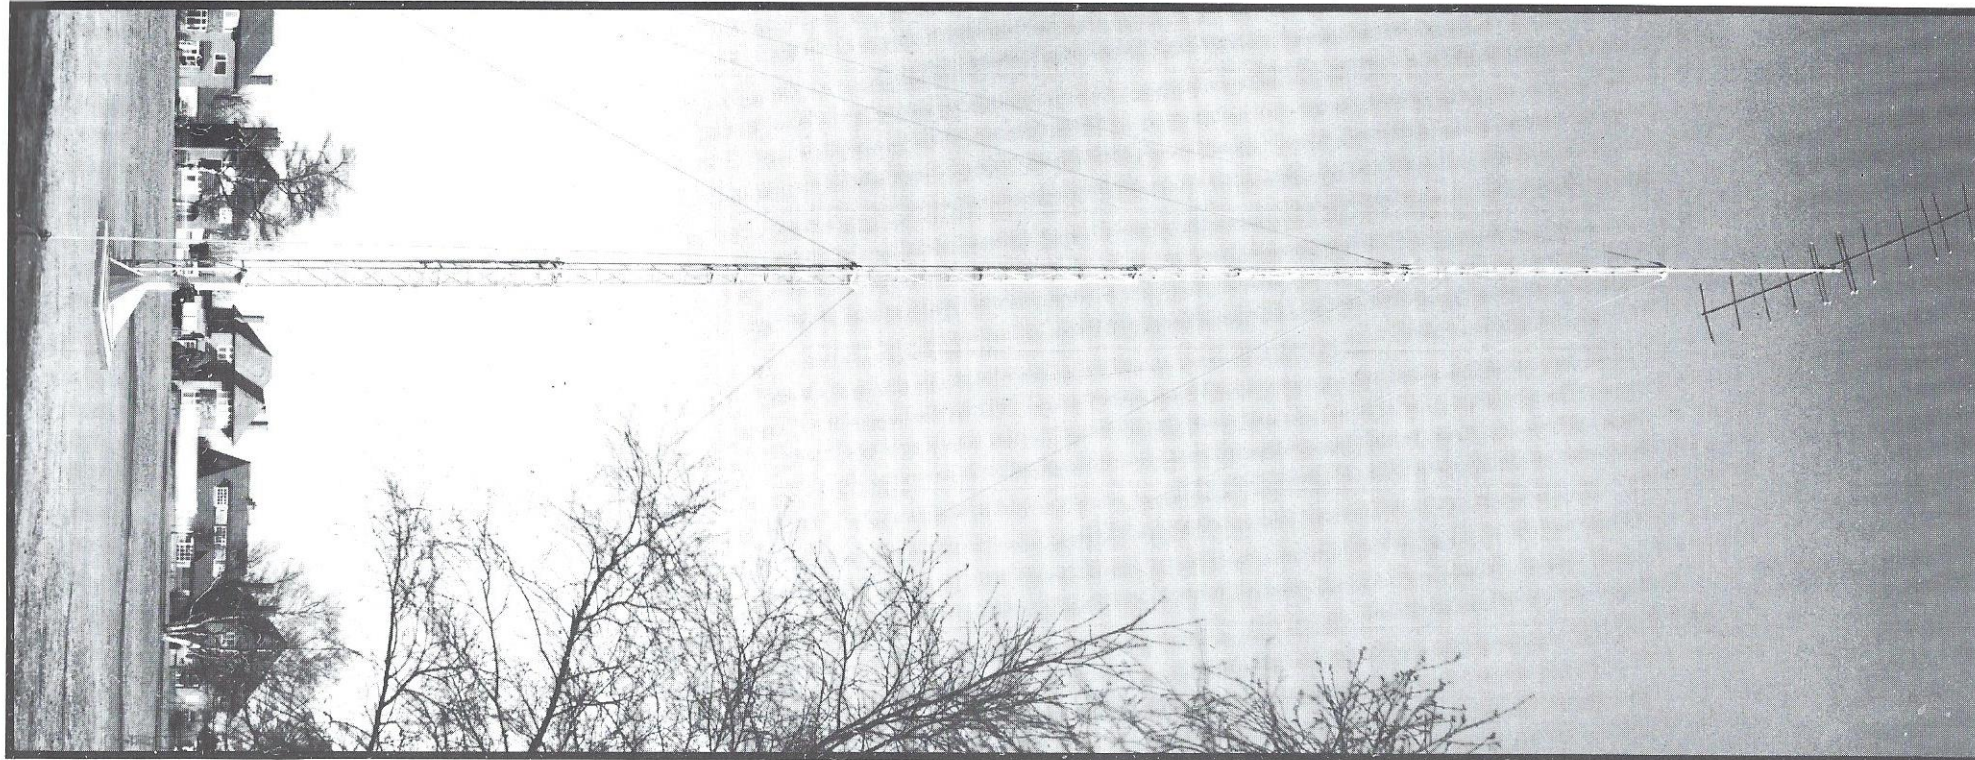

Specification and technical data.

Supplied as standard.

Telescopic gear.

Luffing gear.

Heavy duty auto-brake winches.

Guy sets to brochure specification.

Twin panniers on mobiles.

Optional extras.

HD bolts for BP and FB models.

Anti-climbing guards.

Guyed towers

WINDSPEED			AREA OF HEADLOAD				WINDAGE	
			floodlights		tubular aerals			
m/s	kph	mph	m ²	ft ²	m ²	ft ²	kg	lb
38	137	85	1.77	19.0	2.50	26.9	150.6	331.9
45	161	100	1.11	12.0	1.58	17.0	128.1	282.4
54	193	120	0.65	7.0	0.92	9.9	102.6	226.9

Head load: 25kg (55lbs).

Guy anchorage radius: 15 m (50ft).

Concrete foundations required for BP and FB models: 1.7m² × 1.2m deep (5.5ft² × 4ft deep).

Minimum ground bearing pressure: 10.94 tonnes/m² (1 ton/ft²).

Weight:	P100	BP100	SP100	FB100	M100
kg:	548	578	619	507	1524
lbs:	1208	1275	1365	1118	3360