


Versatower 25

7.5m Standard series

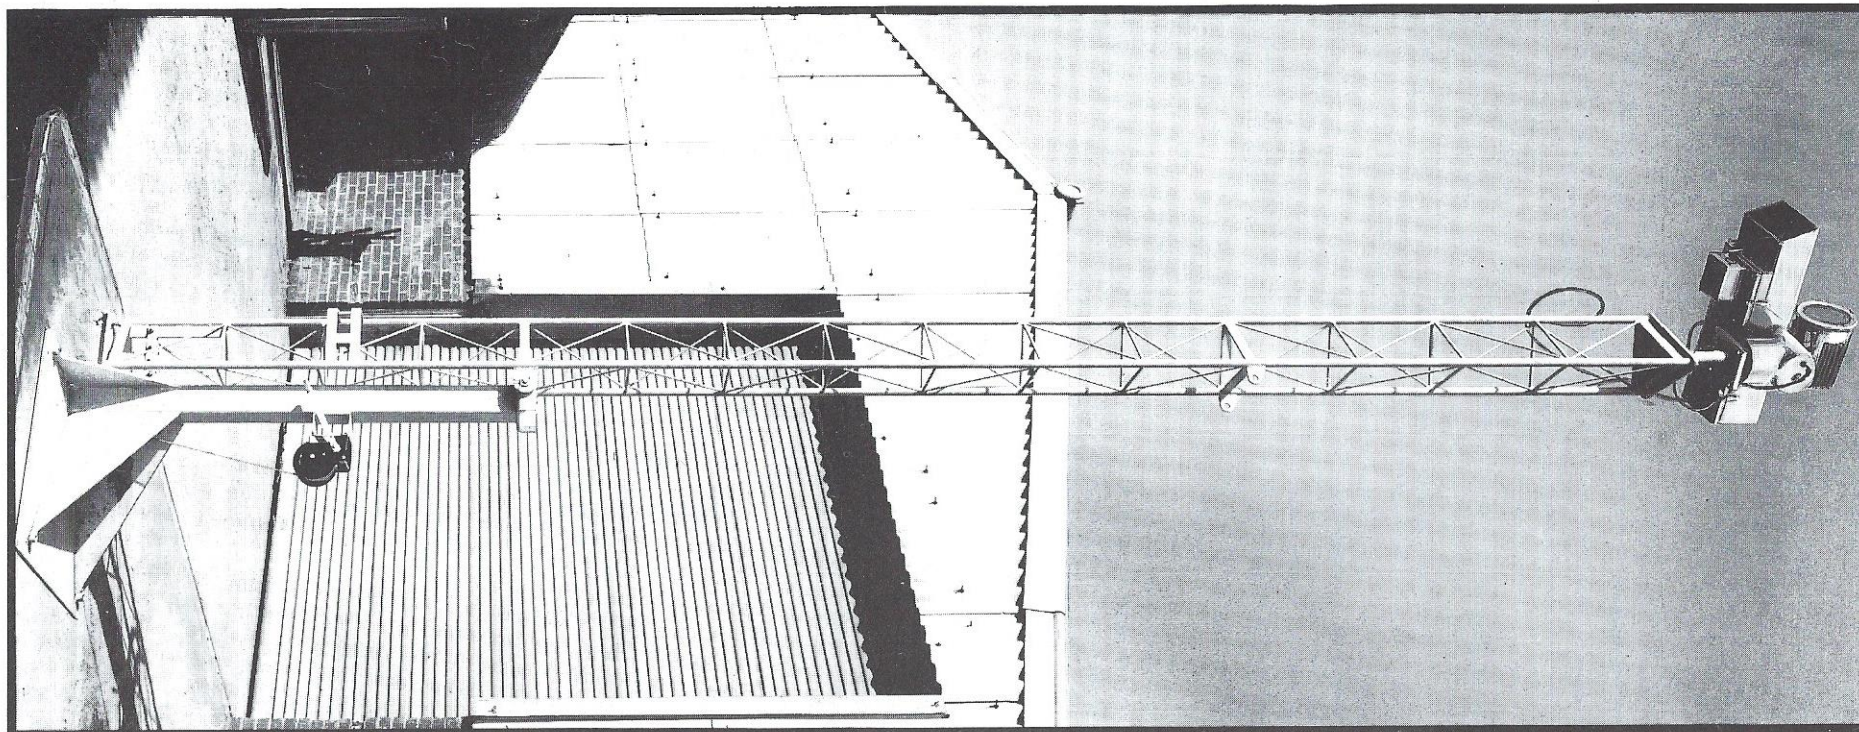

Specification and technical data.

Supplied as standard

Luffing gear (except W models).
Auto brake winch.
H2 head unit or camera mount.
HD bolts for FB models.

Optional extras.

Luffing gear for W models.
HD bolts for BP models.
Guy sets.
Twin panniers for mobiles
Anti-climbing guards

Mobile models are fitted with auto-brake winches and H2 head units as standard.

Unguyed Towers

WINDSPEED			AREA OF HEADLOAD				WINDAGE		O/T AT BASE	
			floodlights		tubular aerals					
m/s	kph	mph	m ²	ft ²	m ²	ft ²	kg	lb	tonnes m	tons ft
27	97	60	3.88	41.8	5.47	59.1	284.5	626.9	2.18	7.06
31	113	70	2.86	30.6	4.04	43.3	283.4	624.7	2.17	7.04
36	129	80	2.18	23.4	3.06	33.1	283.1	623.9	2.17	7.03
*38	137	85	1.94	20.8	2.72	29.4	284.1	626.1	2.17	7.05
40	145	90	1.71	18.4	2.40	26.00	281.7	620.9	2.15	6.99
45	161	100	1.38	15.0	1.96	21.2	283.5	624.9	2.17	7.04
49	177	110	1.14	12.4	1.61	17.5	283.6	625.1	2.17	7.04
54	193	120	0.97	10.4	1.37	14.7	283.1	623.9	2.17	7.03

* Minimum design windspeed in the U.K. to comply with CP3 Chapter V: part 2: 1972.

Head loads: H2 56kg (125lbs).

Concrete foundations required for BP and FB models: 1.2m³ (4ft³).

Minimum ground bearing pressure: 10.94 tonnes/m² (1 ton/ft²).

Weight:	W25	P25	BP25	SP25	FB25	M25
kg:	127	194	227	266	140	945
lbs:	281	428	600	587	309	2084